
6 MODULE ENCLOSURES High/Low M6



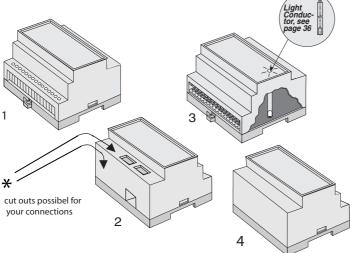


Many other connectors and terminal

configurations are available upon request

Options:


- open version for bigger terminals, no terminal numbers.

- not all versions are available for all sizes.

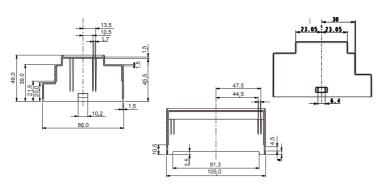

For detailed drawings please see www.bernic.dk or ask for a CAD drawing

HORIZONTAL PCB DIMENSIONS

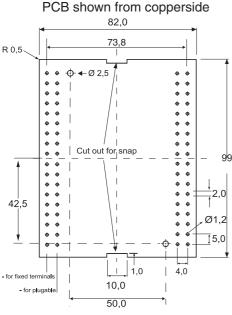

TYPE High/low M6	ORDER CODE:
Complete, 257 for plugable	p/n 4979341051
Complete, 605 for fixed terminals	p/n 4979341052
Complete, closed, no terminals	p/n 4979341050
Top part, 257, plugable	p/n 4979331051
Top part, 605 / 250 fixed terminals	p/n 4979331052
Top part, grey, closed, no terminals	p/n 4979331050
Base part with clip and 2 screws	p/n 4979021051
Transparent lid for 1050	p/n 0669000604
Packing for 1050	p/n 4969011050
PCB for 1050	p/n 2068105000
Terminal for 1050, 257/18, HO/A, PCB part	p/n 4999001050
Terminal for 1050, 256/18, wire part	p/n 1155718580
Terminal for 1050, 605/18, fixed terminals	p/n 1155618080
Screw/selfcutting 2 pcs.	p/n 3950141808

Many more p/n available - please enquire.

• All measurements are in mm.

• Please note that most plugable terminals are in 5,08 pitch and need a bigger hole in the PCB

Module enclosure for M36 Din-rail. Series High-Low is designed to give more room for special connectors and larger components and if requested with custom made holes for connectors and terminals.

Lid, PCB, customized label and packing is available. Possibility for both base and top PCB. A closed version without terminals is also available. Trimmers and spindles that fit the height of the box are available.

TECHNICAL DATA:

TOP PART:

Material: Colour: Max. temperature: Width:

Lexan 940 Grey (RAL 7035) 100°C 105 mm (6 modules) Label measurement: 41.0 x 100.0 mm Acc. to UL94-V0 IP 20

Self-extinguishing: **IP** Protection:

BASE PART:

Material: Colour: Max. temperature: Max. load: Terminals: Mounting: Self-extinguishing: Noryl VO 1550 Black (RAL 9005) 100°C please enquire 36 fixed or plugable DIN-rail (EN50022) Acc. to UL94-V0