
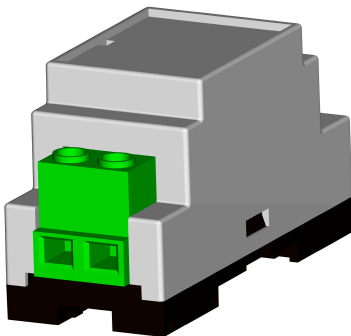


2 MODULE ENCLOSURE FOR HIGH POWER

SERIES

High Power

The latest edition to Bernic's range of DIN rail mounting enclosures. The new High Power enclosure line is composed of 6 sizes that vary from 2 to 12 modules becoming available over the coming months.

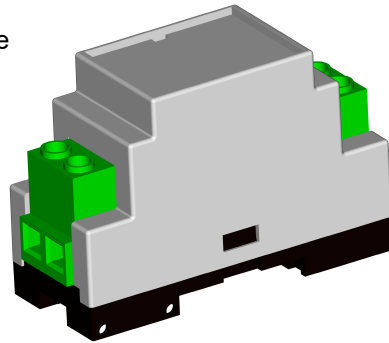

High power version for power terminals or connectors offers an opening for larger terminals. Other connectors up to 63A available upon request.

High Power module enclosure for M36 DIN rail. Series High Power is, if requested, available in several colours and with customer specified holes in front. Lid, PCB, customized label and packing is available. Possibility for both base and top PCB. Trimmers and spindles that fit the height of the box are available.


TECHNICAL DATA

TOP PART:

Material: Lexan 940
 Colour: Grey (RAL 7035)
 Max. temperature: 100° C
 Width: 35.0 mm (2 modules)
 Label measure: 41.0 x 30.0 mm Acc. to UL94-V0
 Self-extinguishing: IP protection: IP 20


BASE PART:

Material: Noryl VO 1550 Black (RAL 7005) 100° C
 Colour: 63A (for higher load please inquire)
 Max. temperature: 6 fixed or pluggable
 Max. load: DIN rail (EN50022)
 Terminals: Mounting: Acc. to UL94-V0
 Self-extinguishing:

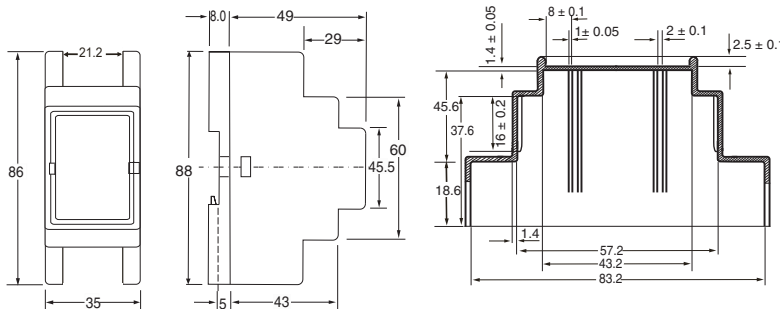

For detailed drawings please see www.bernic.dk or ask for a CAD drawing.

HORIZONTAL PCB DIMENSIONS:

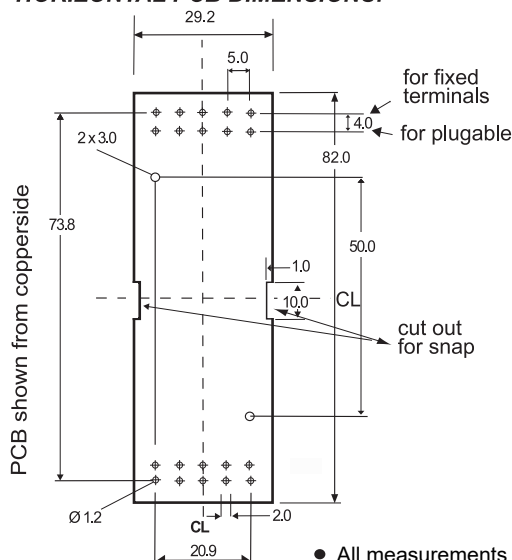

- All measurements are in mm.
- Please note that most pluggable terminals are in 5,08 pitch and need a bigger hole in the PCB.

TYPE 350 HIGH POWER:	ORDER CODE:
High Power Top part	p/n 7142000350
Base part with clip and 2 screws	p/n 4969002351
Transparent lid	p/n 4969001350
Grey lid	p/n 4969001351
DIN rail clip for 350	p/n 0669000605
Packing for 350	p/n 2068350035
Raw PCB for 350	p/n 4999000350
Screw/selfcutting 2 pcs.	p/n 7006102965

Many more p/n available - please enquire.